



## The Evolution of Power Distribution to the Rack



"I wish we knew about Z-PDS when we were designing our facility... it's modular functionality would have significantly reduced the cost of our build-out. We would not have bought RPPs."

**The Zonit Z-PDS is the next step in the evolution of power distribution to the rack.** Our modular power distribution system brings complete three-phase, A-B power redundancy into your rack.

At half the cost, it is a more effective solution than traditional distribution. It saves space by replacing RPP's and whips, busway, and rack power strips. And with features like automatic three phase load balancing, it is safer and more reliable.

The Z-PDS outputs a wide variety of single or three-phase power. A single Z-PDS can feed 1-6 racks depending on your power density needs. The system is compatible with all standard power distribution methods including whips, busways and RPP's. And the Z-PDS is revolutionary because it can also replace all of these standard power distribution methodologies.

### KEY BENEFITS

- Reduces installation and operating costs associated with traditional power distribution
- Increases available breaker positions and frees data center floor space
- Improves the safety and reliability of your electrical infrastructure

### ZONIT Innovative Technology, Creative Solutions

Zonit is a mission critical product development company that's revolutionizing data center operations through innovative power distribution solutions.

Based in Boulder, Colorado, Zonit has over 100 patents on its products and designs. We have one purpose: to meet the challenges of today's data center operator.

Our modular solutions displace the status quo, maximizing system uptime, security, and flexibility to provide you more control, less risk, and greater efficiency.





## 30A, 40A & 60A

### 20A 208V, 415V & 480V OUTPUT



(6) L21-20R or L22-20R output receptacles



(4) L21-20R and (6) 5-15R output receptacles

### 30A 208V, 415V & 480V OUTPUT



(4) L21-30R or L22-30R output receptacles


### PLUG ADAPTERS

Available in any locking or non-locking 15A, 20A, or 30A configuration.



Input  
Plugs

Output  
Receptacles

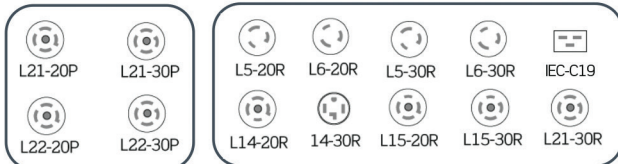

## SPECIFICATIONS

ELECTRICAL	
Rated Input Voltage	Three Phase 208V, 415V or 480V, either wye or delta configuration
Rated Input Amperage	30, 40 or 60 amps
Standard Input Cords	Two A + B 10-foot SOW input cords; other lengths available custom
Input Cord Termination Options	Hardwire box: standard for all models. NEMA L21/22 Plugs: standard for NEMA L21 – 208V models. IEC 60309 pin & sleeve: standard for NEMA L22 – 415 or 480V models. Starline tap box – optional for all models
Output Receptacle Options	For 60A inputs: (6) 20A NEMA L21 or L22 OR (4) 30A NEMA L21 or L22 OR (12) 20A IEC C19  For 30A inputs: (4) 20A NEMA L21 or L22. For 30A/208V: (4) 20A NEMA L21 or L22 & (6) 20A NEMA 5-15 receptacles  All outputs are split evenly into A + B feeds
Output Branch Circuit Protection	Individual 20A or 30A circuit breakers protect each hot output phase of each output receptacle
PHYSICAL	
Dimensions (L x W x D)	11.13 x 17.50 x 3.50 (2RU) in (282.6 x 444.5 x 88.9 mm)
Weight	29 lb (13.2kg)
Shipping Weight	33 lb (15kg)
ENVIRONMENTAL	
Elevation – Operating	0 to 10,000 ft (0 to 3000m)
Elevation – Storage	0 to 50,000 ft (0 to 15000m)
Temp – Operating	23 to 113°F (-5 to 45°C)
Temp – Storage	-13 to 149°F (-25 to 65°C)
Operating Humidity	0 to 95% Non-condensing
APPROVALS	
Safety	UL/cUL File E340237

Please visit [www.zonit.com](http://www.zonit.com) to watch product videos, view configuration options, or to get more technical information about the revolutionary Z-PDS product.



1790 30th Street | Suite 140 | Boulder, CO | 80301  
720.266.0050 | [info@zonit.com](mailto:info@zonit.com)